

UPS UNINTERRUPTABLE POWER SUPPLY

Characteristic

1. Single way output
2. Double numeral pipe led display output voltage and current value respectiely
3. Under steady voltage and current condition. the voltage and current can be changed automatically, its can be indicated by luminous pipe.
4. Using limied current protection way, limited current point may optionally adjust
5. Double way output voltage may use in series and parallel connection
6. All are plastic plate, the exterior is exquisite and applied

Technical Index

Type	Output Voltage	Output Current	Fixedoutput
DSJ-1502S	0-15V	0-2A	5V 3A
DSJ-1503S	0-15V	0-3A	5V 3A
DSJ-1505S	0-15V	0-5A	5V 3A
DSJ-1510S	0-15V	0-10A	5V 3A
DSJ-302S	0-15V	0-2A	5V 3A
DSJ-303S	0-30V	0-3A	5V 3A
DSJ-305S	0-30V	0-5A	5V 3A
DSJ-602S	0-60V	0-2A	5V 3A

Waves and voice: $CV \leq 1\text{mvrms}$ $CC \leq 5\text{mAms}$

Power supply domino effect: $CV \leq 1 \times 10^{-4} + 0.5\text{mv}$ $CC \leq 2 \times 10^{-3} + 1\text{mA}$

Load domino effect: $CV \leq 1 \times 10^{-4} + 10\text{mv}$ $CC \leq 2 \times 10^{-3} + 3\text{mA}$

Dimension and weight: $290 \times 260 \times 155$

Characteristic

1. Single way output
2. Double pointer type display output voltage and current value respectiely
3. Under steady voltage and current condition. the voltage and current can be changed automatically, its can be indicated by luminous pipe.
4. Using limied current protection way, limited current point may optionally adjust
5. Double way output voltage may use in series and parallel connection
6. All are plastic frame, the exterior is exquisite and applied

Technical Index


Type	Output Voltage	Output Current	Fixedoutput
DSJ-603S	0-60V	0-3A	5V 3A
DSJ-605S	0-60V	0-2A	5V 3A
DSJ-3010S	0-30V	0-10A	5V 3A

Waves and voice: $CV \leq 1\text{mvrms}$ $CC \leq 5\text{mAms}$


Power supply domino effect: $CV \leq 1 \times 10^{-4} + 0.5\text{mv}$ $CC \leq 2 \times 10^{-3} + 1\text{mA}$

Load domino effect: $CV \leq 1 \times 10^{-4} + 10\text{mv}$ $CC \leq 2 \times 10^{-3} + 3\text{mA}$

Dimension and weight: $290 \times 260 \times 155$

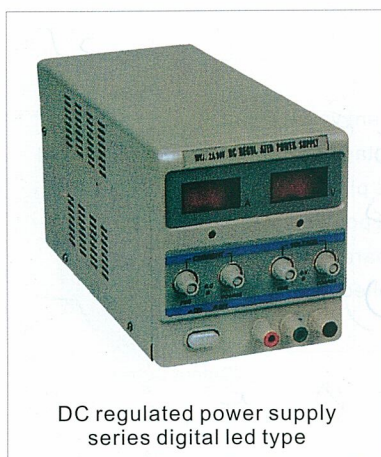

DC regulated power supply
series digital led type

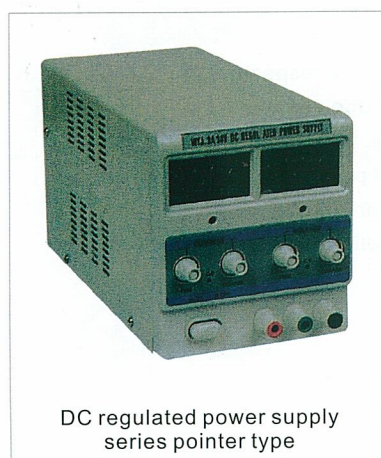

DC regulated power supply
series pointer type