


Precut shims

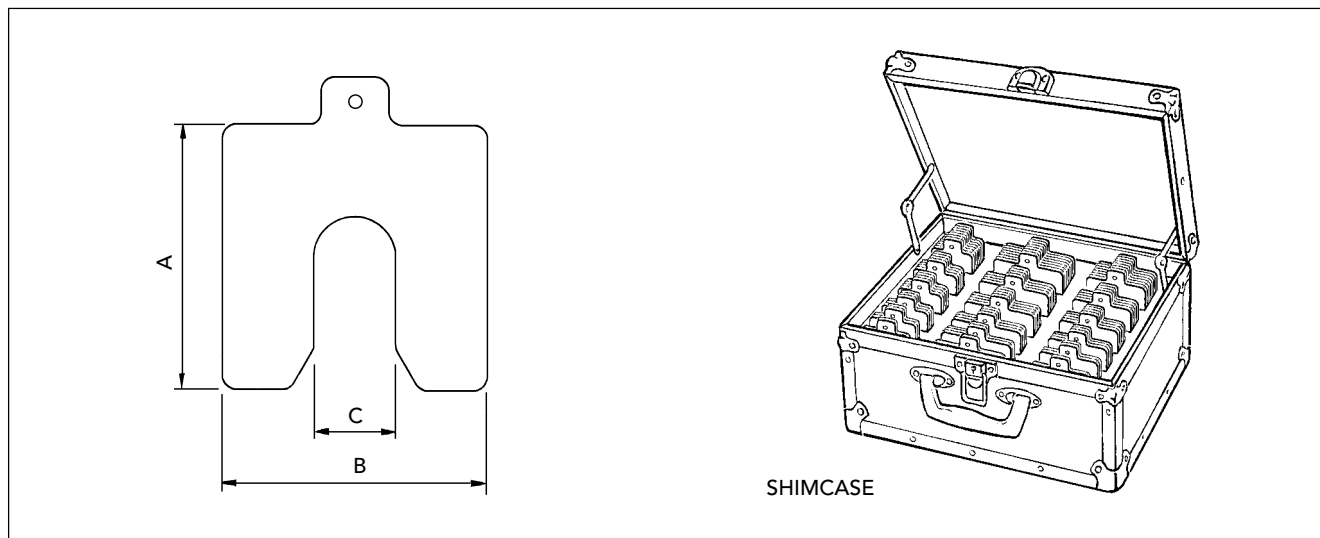

The line of shimming materials contains five different sizes, fitting almost any type of machine foot. The user can choose between solid stainless steel shims and laminated shims in either brass or stainless steel.

Solid shims in stainless steel

Solid shims can be provided in a handy box, containing 10 shims each of 5 different thicknesses, from 0.05 to 1 mm. They are also available as packs of 10 in single thickness, in accordance with ordering number tables.

Laminated shims

Packs of 20 laminated shims are available in either brass or stainless steel. Each shim has a thickness of 1.00 mm, divided into 12 layers. Laminated shims always fit - just peel off the required thickness.

Cases with solid shims

Solid shims in stainless steel are available packaged in convenient aluminium framed cases with a compartmentalised high density foam insert. The refillable cases are available with four different assortments. The cases are overall 350 x 160 x 280 mm except for SHIMCASE 4 which is 540 x 210 x 320 mm.

Ordering numbers, cases with solid shims

SHIMCASE 1 360 shims: 2 x S1-, S2- and S3-PAK + 2 x S1-, S2- and S3-200. Weight 13 kg.

SHIMCASE 2 510 shims: 2 x S1-, S2- and S3-PAK + 2 x S1-, S2- and S3-020; 040; 070; 200. Weight 17 kg.

SHIMCASE 3 340 shims: 2 x S3- and S4-PAK + 2 x S3- and S4-020; 040; 070; 200. Weight 15 kg.

SHIMCASE 4 720 shims: 2 x S1-, S2-, S3- and S4-PAK + 2 x S1-, S2-, S3- and S4-020; 040; 070; 200. Weight 26 kg.

10 stainless steel shims, single thickness

Dimension A B C			Ordering numbers Thickness (mm)					
			0.025	0.05	0.10	0.20	0.25	0.40
35	30	9		S0-005	S0-010	S0-020	S0-025	S0-040
50	50	13	S1-0025	S1-005	S1-010	S1-020	S1-025	S1-040
75	75	21	S2-0025	S2-005	S2-010	S2-020	S2-025	S2-040
100	100	32	S3-0025	S3-005	S3-010	S3-020	S3-025	S3-040
125	125	45	S4-0025	S4-005	S4-010	S4-020	S4-025	S4-040
200	200	55		S5-005	S5-010	S5-020	S5-025	S5-040

10 stainless steel shims, single thickness

Dimension A B C			Ordering numbers Thickness (mm)				
			0.50	0.70	1.00	2.00	3.00
35	30	9	S0-050	S0-070	S0-100		
50	50	13	S1-050	S1-070	S1-100	S1-200	S1-300
75	75	21	S2-050	S2-070	S2-100	S2-200	S2-300
100	100	32	S3-050	S3-070	S3-100	S3-200	S3-300
125	125	45	S4-050	S4-070	S4-100	S4-200	S4-300
200	200	55	S5-050	S5-070	S5-100	S5-200	S5-300

50 stainless steel shims, 10 of each thickness, 0.05 - 1.00 mm

Dimension A B C			Ordering numbers Thickness 0.05, 0.10, 0.25, 0.50 and 1.00 mm	
50	50	13	S1-PAK	
75	75	21	S2-PAK	
100	100	32	S3-PAK	
125	125	45	S4-PAK	
200	200	55	S5-PAK	

Laminated shims, pack of 20, thickness 1.00 mm

Dimension A B C			Ordering numbers Stainless steel	Ordering numbers Brass
50	50	13	LS1-PAK	LB1-PAK
75	75	21	LS2-PAK	LB2-PAK
100	100	32	LS3-PAK	LB3-PAK
125	125	45	LS4-PAK	LB4-PAK
200	200	55	LS5-PAK	LB5-PAK

